

**Materials of Construction:**

Manifold & Inlet/Outlet Connections: 1" copper (1-1/8"OD)  
 Coil Tube: 3/8" seamless copper  
 Casing: 18 gauge galvanized steel  
 Fins: 0.004" thick aluminum, 12 fins per inch

**Performance Data:**


Max Operating Temperature: 350F  
 Max Test Pressure: 435psi  
 Max Operating Pressure: 360psi

**Applications:**

- Hot Water Heating
- Chilled Water Cooling
- Other Liquid to Air Heat Transfer Applications

**Features:**

- Standard high capacity output
- Maintenance free
- Compact & sturdy design

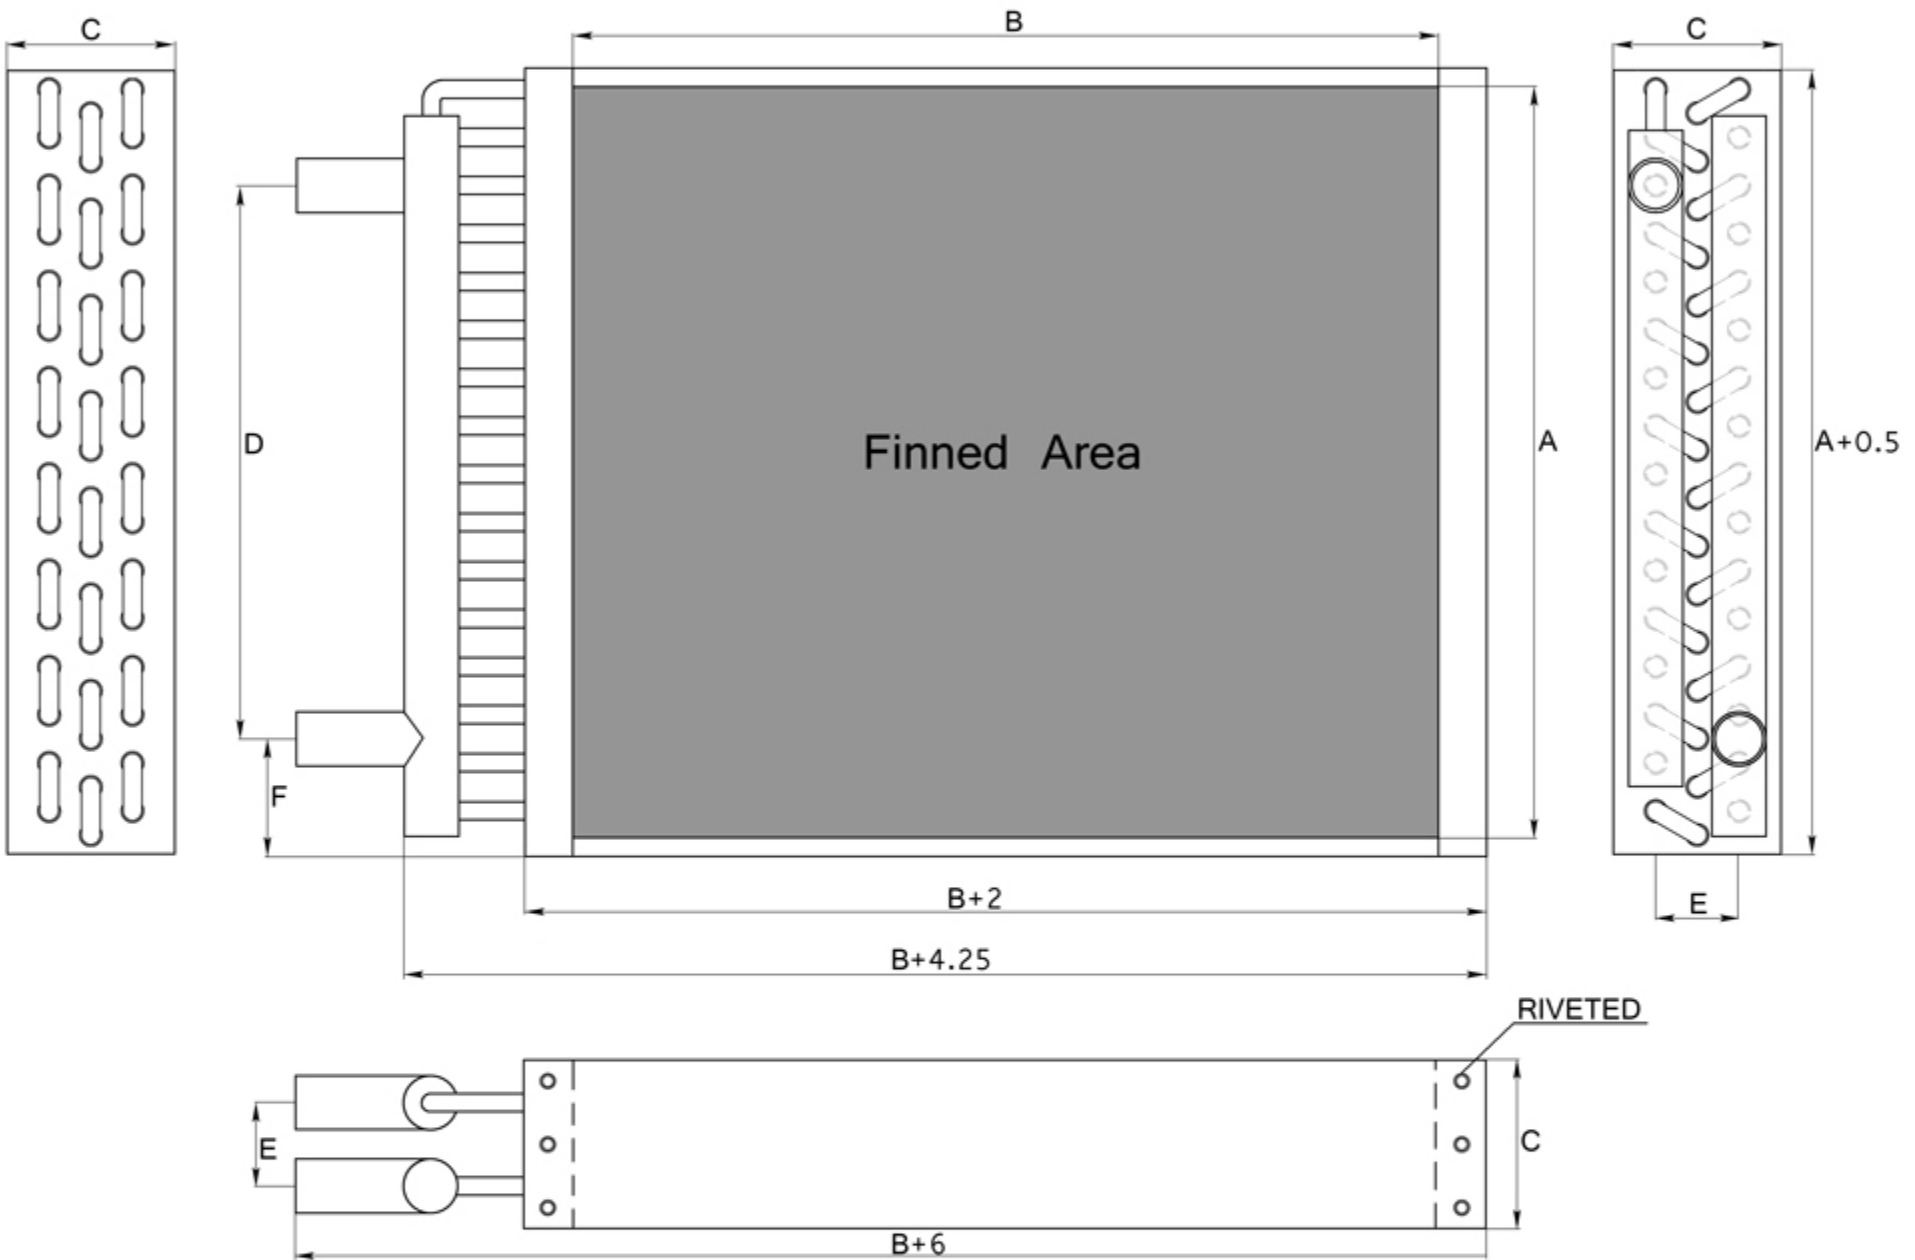

Model	A (inches)	B (inches)	C (inches)	D (inches)	E (inches)	F (inches)	System connection	Weight (lbs)	Box Dimensions (L x W x H)
BT-HTL12x12	12"	12"	3.50"	7.75"	1.75"	2.40"	1" Sweat	10.5	13"x21"x4"
BT-HTL16x16	16"	16"	3.50"	11.50"	1.75"	2.50"	1" Sweat	15.5	17"x25"x4"
BT-HTL16x18	16"	18"	3.50"	11.50"	1.75"	2.50"	1" Sweat	16.5	17"x27"x4"
BT-HTL18x18	18"	18"	3.50"	13"	1.75"	2.75"	1" Sweat	18.5	19"x27"x4"
BT-HTL18x20	18"	20"	3.50"	13"	1.75"	2.75"	1" Sweat	19.5	19"x29"x4"
BT-HTL19x20	19"	20"	3.50"	14.50"	1.75"	2.50"	1" Sweat	20	20"x29"x4"
BT-HTL20x20	20"	20"	3.50"	14.50"	1.75"	3"	1" Sweat	22	21"x29"x4"
BT-HTL22x22	22"	22"	3.50"	17.50"	1.75"	2.50"	1" Sweat	25	23"x31"x4"